

For Light Commercial and Residential Applications

Job Name _____
 Job Location _____
 Engineer _____
 Approval _____

Contractor _____
 Approval _____
 Contractor's P.O. No. _____
 Representative _____

STAINLESS STEEL BRAIDED CONNECTORS

Features:



- Stainless Steel braided hose
- PEX tubing
- Available in straight and elbow versions
- 1 year warranty

Pressure – Temperature

Working Pressure: 16 bar
 Temperature: Min 5°C to Max 90°C

Sizes

Hose: 8mm ID and 10mm ID
 Fittings:
 1/2" FEMALE X 1/2" FEMALE
 Length: sizes from 150mm to 1500mm
 1/2" FEMALE X 1/2" FEMALE ELBOW
 Length: sizes from 100mm to 600mm

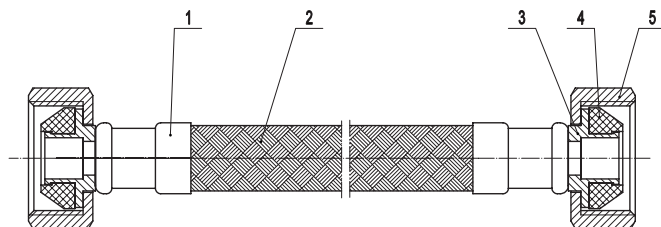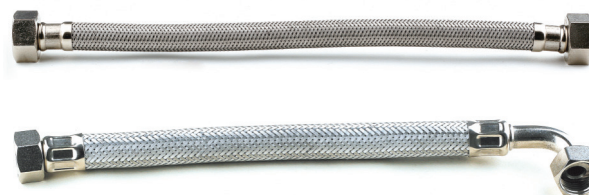

Standards
 Watermark License WMKA21021

NO.	NAME	MATERIAL
1	Sleeve	SS 304
2	SS Braided Hose	SS 304SS, PEX
3	Barb	DZR Brass
4	Washer	EPDM
5	Hexagon Nut	DZR Brass

Dimensions

Model and description examples:

Model	Diameter	Fittings	Length
84158744	8 mm	1/2" FEMALE X 1/2" FEMALE	150 mm
84158755	8 mm	1/2" FEMALE X 1/2" FEMALE ELBOW	150 mm

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.




Installation


This product should be installed by a licensed plumber and it is the responsibility of the installer to ensure the suitability of the connector for the application and for it to comply with any government health codes and regulations.

Refer to the below and the connector product label for the correct installation methods and details, plus the limitations of use and warranty terms for this product.

Typical indicative installations

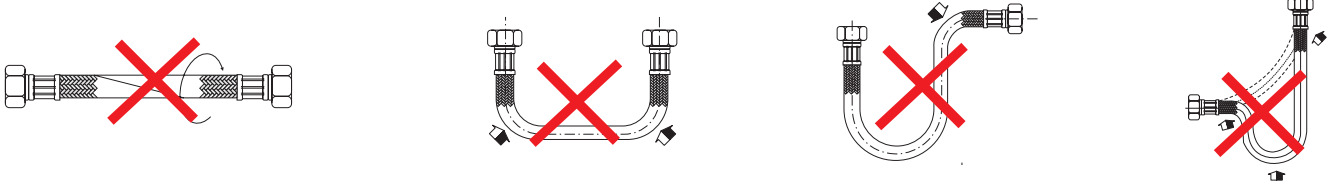

Incorrect Operation

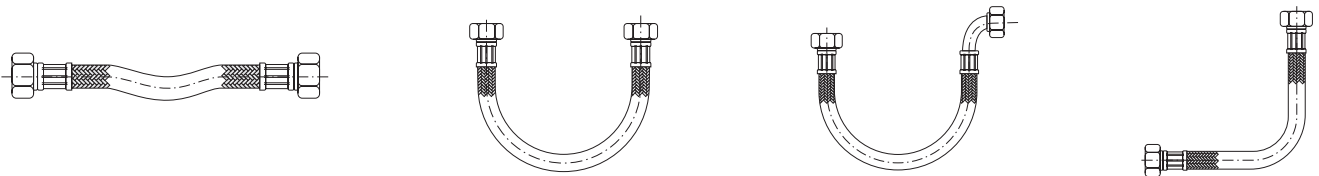

Correct Operation



Australia: Tel: +61 452 669 816 • www.watts.com