





APPLICATION

Brass sleeve valve for fast filling medium troughs.

FEATURES & BENEFITS

- Full flow design
- Robust brass body
- Fully serviceable

SPECIFICATIONS

Working Pressure: 0 - 1000 kPa (150 psi) Flow Rate: 260 L/min (60 gal/min) @ 1000 kPa


Temperature Range: 1°C - 60°C (34°F - 140°F)

AVAILABLE SIZES

20mm (34") with 25mm (1") increasing bush

SPARES & ACCESSORIES

- Cord and nipple
- Use 150mm (6") ball float
- Spare standard arm
- Spare bottom entry arm
- Service Kit (contains plunger/o-ring, washer, cotter pin)

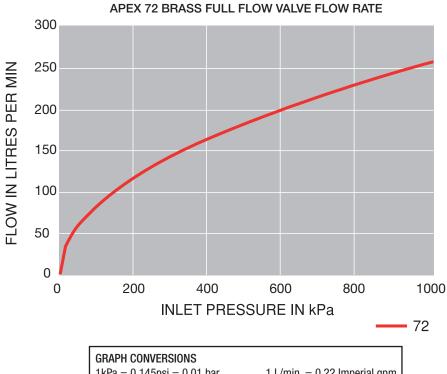

1kPa = 0.145psi = 0.01 bar1 L/min. = 0.22 Imperial gpm